


REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	09/08/2016	M. Dong

TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range:
-40~+85 °C (Normal Heat-shrinkable Tube)
-40~+150 °C (High Temp. Heat-shrinkable Tube)
3. Durability: 5000 Cycles
4. Armor Compressive: 100N/25mm
5. Withstanding Voltage: 500V DC
6. Frequency range: 0~40 GHz
7. VSWR: 1.30:1
8. Cable assembly to be 100% tested on VNA

9. MATERIALS AND FINISHES

- 2.92mm Male Connectors:
Body - Stainless Steel (SU303), Passivated
Center contact - Beryllium Copper Alloy plated Gold
Insulator - PEI

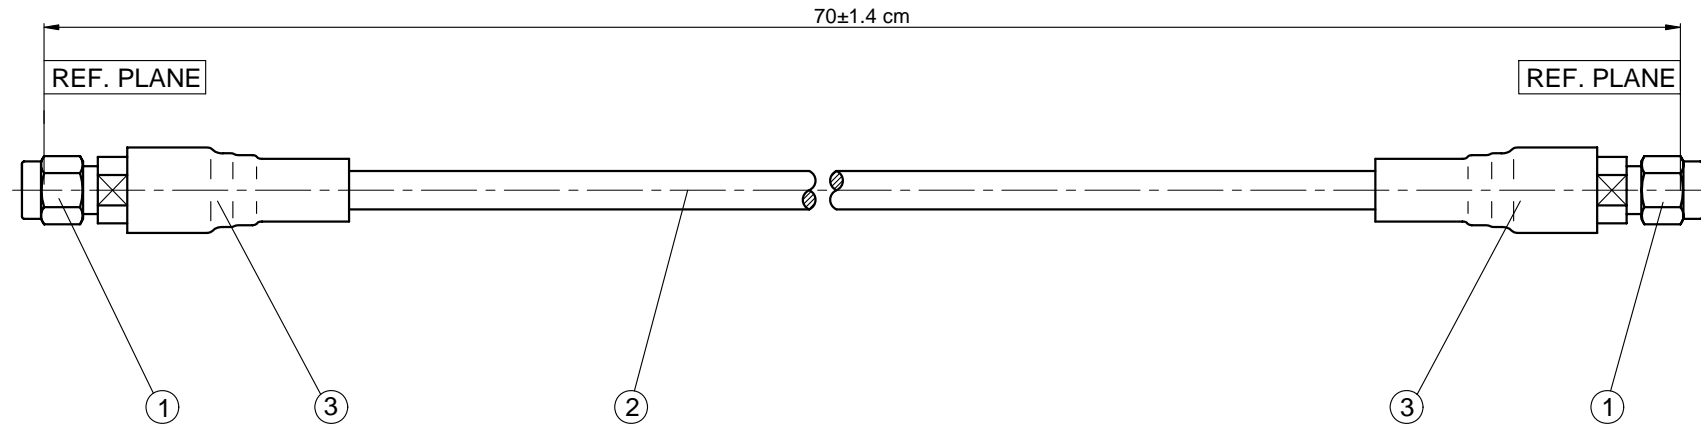

3		Dual Wall Heat-shrinkable Tube	2
2	CTAL-520	CTAL-520 Test Cable	1
1	96-03-2M66-045	2.92mm Straight Male Solder for CTAL-520 Cable	2
S/N	Part No.	Description	QTY

RoHS Compliant

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [005"] .X ±0.20 [008"] X ±0.50 [019"] ANGULAR TOLERANCES ARE: ALL±1° OVERALL CABLE LENGTH TOLERANCES ARE: ±2%	DRAWN: L. Ma 09/08/2016
DO NOT SCALE DRAWING	CHECKED: J. Zhu 09/08/2016
PROJECTION:	APPROVED: M. Dong 09/08/2016

TITLE:	Cable assembly, 2.92mm Male to 2.92mm Male, CTAL-520 Cable, 70cm
--------	--

Cmppter Electronics Co., Ltd. www.cmppter.com			
PART No.: CA520AL-2.92M-2.92M-70cm-1284			
SIZE: A4	SCALE: 1:1	SHEET: 1/1	REV: A