

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
A	INITIAL RELEASE	—	L. Ma	11/08/11	M. Dong

TECHNICAL DATA

■ Electrical data

Impedance	50 Ω
Frequency range	0~18 GHz
VSWR	1.15:1

■ Mechanical data


Temperature range	-55 °C ~ +165 °C
Durability (matings)	>500

■ Material data

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI



■ Interface Standards

N	MIL-STD-348A
---	--------------

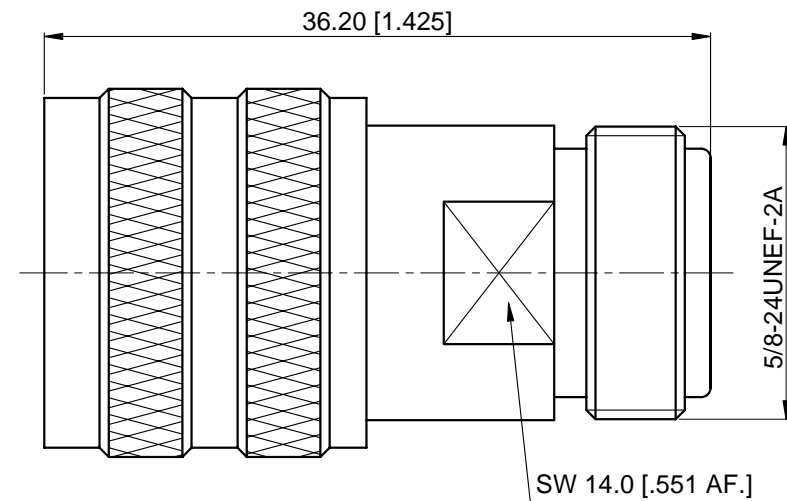

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. Ma 11/08/11	TITLE:	 www.cmppter.com
ENGINEER: J. Zhu 11/08/11	Quick Match Adapter, N Male to N Female	
APPROVED: M. Dong 11/08/11		
TOLERANCE UNLESS OTHERWISE SPECIFIED		 DIMENSIONS IN MILLIMETERS (mm)
X ±0.50 [.019"]	PART No.: QA-NM-NF-216	SIZE: A4
.X ±0.20 [.008"]		SCALE: 2.5:1
.XX ±0.10 [.004"]		SHEET: 1/1
ANGLES ±1°		REV: A