

TECHNICAL DATA

Electrical

Impedance 50 Ω
 Frequency range 0~6 GHz
 Insulation resistance ≥5x10³ MΩ
 Withstanding voltage 1000 V

Mechanical & Environmental

Durability (matings) >500
 Temperature range -55 °C ~ +165 °C
 RoHS Compliant Yes



Material & Finish

Body Brass, Nickel-plated
 Pin Contact Phosphor Bronze, Gold-plated
 Solder Tail Brass, Albaloy-plated
 Insulator PTFE

Interface Standards

N IEC-60169

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	---	05/19/2016	M. Dong
B	DIMENSIONS CHANGED	---	05/19/2016	M. Dong

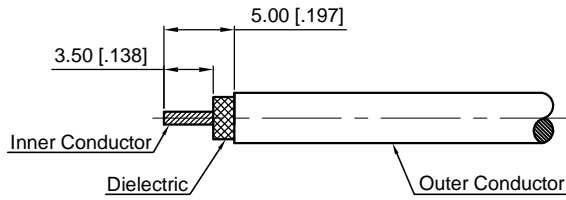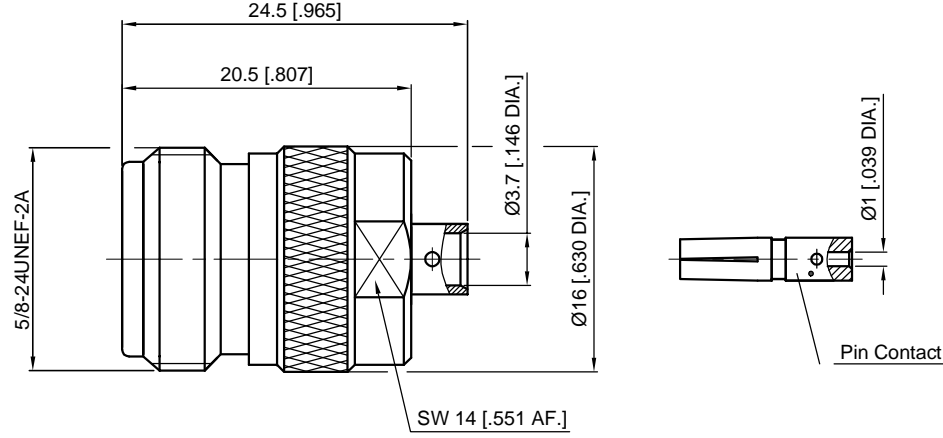

CABLE STRIPPING DIMENSION

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL=±1° DO NOT SCALE DRAWING PROJECTION:	DRAWN:	L. Ma	05/19/2016
	CHECKED:	J. Zhu	05/19/2016
	APPROVED:	M. Dong	05/19/2016
	TITLE:	N Straight Female Solder for RG402/.141 Cable	

CMPPTER®
 Cmppter Electronics Co., Ltd. www.cmppter.com

PART No.:
50-02-2M06-159

SIZE: A4	SCALE: 2:1	SHEET: 1/1	REV: B
----------	------------	------------	--------